

1. Identification code: **Redwood and Whitewood**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Internal or external panelling/cladding for wall or ceiling without treatment or coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance


Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m ³ Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature)

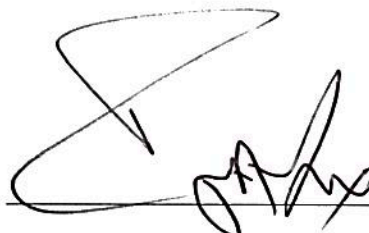


1. Identification code: **Western Red Cedar, Douglas Fir, Western Hemlock and Southern Yellow Pine.**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Internal or external panelling/cladding for wall or ceiling without treatment or coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m ³ Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

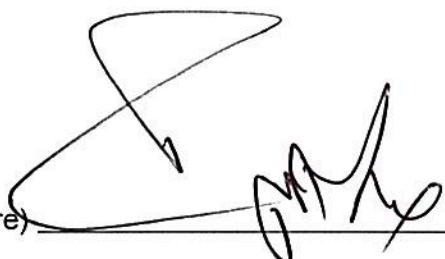(signature) 

1. Identification code: **American Black Walnut, American Black Cherry, Iroko, Sapele, Meranti, Framire, Utile, European Oak**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards) without treatment or coating**
3. Intended use (s): **Internal or external panelling/cladding for wall or ceiling**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m ³ Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature) 

1. Identification code: **American White Ash, American White Oak, American Hard Maple, American Poplar, European Beech**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Internal panelling/cladding for wall or ceiling without treatment or coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m3 Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature) 


1. Identification code: **Softwood**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Softwood Flooring without surface coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	12mm	BS EN 14342:2005+A1:2008
Reaction to fire	C _{fl} -s1 (CWFT-EN14342, Table 1; spruce density 450kg/m ³ others density 390kgm ³)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Breaking Strength	npd	
Slipperiness	npd	
Thermal conductivity	0.13 (EN12524)	
Biological durability	Class 1 (EN335-1)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature) 


1. Identification code: **Hardwood**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Hardwood Flooring without surface coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	8mm	BS EN 14342:2005+A1:2008
Reaction to fire	C _{fl} -s1 (CWFT-EN14342, Table 1; beech density 680kg/m ³ oak density 650kg/m ³ others density 390kgm ³	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Breaking Strength	npd	
Slipperiness	npd	
Thermal conductivity	0.13 (EN12524)	
Biological durability	Class 1 (EN335-1)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

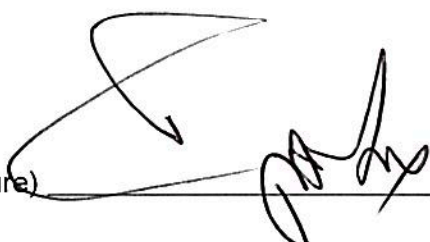(signature) 

1. Identification code: **Redwood and Whitewood**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Internal or external panelling/cladding for wall or ceiling with treatment or coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
Coating/Treatment per external approved suppliers
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m3 Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature)



1. Identification code: **Western Red Cedar, Douglas Fir, Western Hemlock and Southern Yellow Pine.**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Internal or external panelling/cladding for wall or ceiling with treatment or coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
Coating/Treatment per external approved suppliers
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constasy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance


Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m3 Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature)

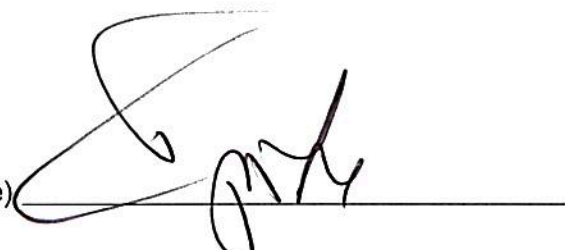

1. Identification code: **American Black Walnut, American Black Cherry, Iroko, Sapele, Meranti, Framire, Utile, European Oak**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards) with treatment or coating**
3. Intended use (s): **Internal or external panelling/cladding for wall or ceiling**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
Coating/Treatment per external approved suppliers
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m ³ Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature)




1. Identification code: **American White Ash, American White Oak, American Hard Maple, American Poplar, European Beech**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Internal panelling/cladding for wall or ceiling with treatment or coating**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
Coating/Treatment per external approved suppliers
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	6mm	BS EN 14915:2006
Reaction to fire	D-s2,d2 (CWFT-EN14915, Table 1; density 390kg/m3 Minimum total thickness 9mm, minimum thickness 6mm)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Acoustic performance	npd	
Water Vapour permeability	60 (see EN14915, clause 5.4)	
Sound Absorbtion coefficient	0,10/0.30 (see EN14915, clause 5.5)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature) 

1. Identification code: **Softwood**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Softwood Flooring with surface coating/treatment**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
Coating/Treatment per external approved suppliers
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	12mm	BS EN 14342:2005+A1:2008
Reaction to fire	C _{fl} -s1 (CWFT-EN14342, Table 1; spruce density 450kg/m ³ others density 390kgm ³)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Breaking Strength	npd	
Slipperiness	npd	
Thermal conductivity	0.13 (EN12524)	
Biological durability	Class 1 (EN335-1)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature)



1. Identification code: **Hardwood**
2. Type, batch or serial number : **as per Works Order Number (01/08/2021 onwards)**
3. Intended use (s): **Hardwood Flooring with surface coating/treatment**
4. Manufacturer Name: **Palmer Timber Ltd**
Address: **Granville Works, Station Road, Cradley Heath B64 6PW**
Coating/Treatment per external approved suppliers
5. Authorised representative: **Ian Cox**
6. Assessment and Verification of Constancy of Performance (AVCP) System: **System 4**
7. Name and identification number of the notified body: **Not applicable**
8. European Technical Assessment: **Not Applicable:**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Minimum thickness	8mm	BS EN 14342:2005+A1:2008
Reaction to fire	C _{fl} -s1 (CWFT-EN14342, Table 1; beech density 680kg/m ³ oak density 650kg/m ³ others density 390kgm ³)	
Fomaldehyde class	E1	
Content of pentachlorophenol	None	
Breaking Strength	npd	
Slipperiness	npd	
Thermal conductivity	0.13 (EN12524)	
Biological durability	Class 1 (EN335-1)	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Cox
Operations Director
01 August 2021

(signature)

